

**envirolyte**

Leader in the EcoWorld

## *Bringing new ground in*


*Sterilisation*



*Disinfecting*



*Water purification*



© 2012. The written and pictorial material in this document is the property of Envirolyte W.P.C. Ltd and its partners and may not be copied, disseminated or reproduced in any form without the written permission of Envirolyte W.P.C. Ltd.

ISO 9001

BUREAU VERITAS  
Certification



## On-site production of solutions for cleaning, disinfecting and sterilizing

### Safe, Effective and Non-toxic, Excellent Return on Investment

Envirolyte ELA units are designed to generate, on-site, cleaning, disinfecting and sterilizing solutions out of 0.05% - 1.0% salt brine (NaCl or KCl).



EL-1200

The units electrolyze the salt water and, using polymer or ceramic membranes, separate the positive and negative ions. As a result of these electrochemical reactions various types of activated solutions are produced. The purpose is to control and/or eliminate pathogens such as bacteria, viruses, spores, mold and fungi, as well as cleaning and removing heavy metals.

The merits of chlorination as a means of destroying pathogens is firmly and universally established. In recent years, however, the appearance of resistant strains of bacteria, the discovery of Legionella, plus other problems associated with chlorine compounds have promoted an interest in alternative water disinfection technologies. Envirolyte fs technologies produce chlorine based compounds but with significant reduction in cost, danger and ecological impact.

### Key Features



EL-1200

- Easy and safe to use
- Efficient: reduced sterilization contact time
- Self-cleaning
- Biodegradable fluids
- Easy operating procedures give the added benefits to rapid delivery of safe and fast acting disinfectant - Neutral Analyte.
- The strength of Neutral Analyte in terms of active chlorine concentration can be adjusted by current setting.

- A flow controller is installed in the Hydraulic part to shut the Envirolyte unit if there is interruption of water supply and to start the unit as soon as water flow resumes.
- A simple on/off switch with power indicator starts and stops the ELA units manually.
- Capacity depends on the model and varies between 40 LPH and 4000 LPH



EL-1200

**Technical characteristics and requirements**

<b>Output capacity</b>	120 LPH of ANK-Neutral Anolyte ONLY with possibility for Catholyte isolation for Ph correction of ANK or Acidic Anolyte (50%-80%) and Catholyte (50%-20%) ONLY
<b>FAC (Minimum)</b>	500 ppm
<b>Water supply</b>	2-3 bar
<b>Salt consumption per 1 liter of Anolyte</b>	6-7 g
<b>Power source</b>	<b>230 VAC</b>
<b>Power consumption</b>	<b>1,8 KW/H</b>
<b>Flushing mode</b>	Manual
<b>Brine delivery</b>	Venture
<b>Type of cell</b>	R-120
<b>Piping &amp; fittings</b>	LLDPE tubing & Kynar fittings
<b>Cabinet(s) size &amp; material</b>	600X400x220 Polyester
<b>Weight</b>	~ 25 kg.

## The Enviolyte Solutions

**ANK-Neutral Anolyte** solution is used wherever pH is important (e.g. corrosion) and where possible evaporation of active chlorine cannot be avoided. Neutral Anolyte is highly effective against a broad range of pathogens including bacteria, viruses, spores, mold and fungi.

Active Ingridient	pH	ORP/REDOX
500 - 700 ppm of active chlorine	5.0 to 8.5	700 to 900

**Acidic Anolyte** solution can be used wherever there is a need to disinfect or sterilize in applications where the pH is unimportant and where there is no danger of corrosion. Acidic Anolyte is a very powerful and fast acting disinfectant against all bacteria, viruses, spores, mold, fungi and algae even when it is diluted in water or sprayed in the air.

Active Ingridient	pH	ORP/REDOX
500 - 700 ppm of active chlorine	2.0 to 3.5	1000 to 1200

**Catholyte Solution** is alkaline and serves as an excellent washing liquid, plus it removes heavy metals from water through precipitation.

Active Ingridient	pH	ORP/REDOX
Sodium Hydroxide	10.0 to 13.0	-900 to -950

Every Enviolyte unit can be set to generate either ANK- Neutral Anolyte only with isolation of a certain volume of Catholyte for Ph correction of ANK or Acidic Anolyte and Catholyte only. Setting of the unit for production of specific fluids is done at the Enviolyte factory

## Producing Solutions

Typically, Anolyte produced by an Enviolyte unit is collected in a container and then dosed into the incoming water. The dosing regime depends on the water flow and quality (properties) of the water and is controlled by a flow meter connected with a dosing pump. The units can stand alone (e.g. for spraying, hand cleaning, CIP disinfection, etc.) or they can be used as part of a continuous process in more complex systems. Design facilities are available for customized units.

**Based on extensive research, both anolyte and catholyte solutions:**

- Are environmentally friendly
- Are non-toxic to both humans and animals



- Do not require special handling;
- Are powerful biocides
- Can be safely disposed of in sewage systems
- Are fast-acting;
- Can be used in all stages of disinfection and cleaning;
- At recommended concentrations, do not bleach surfaces or materials;
- Can be applied in liquid, ice or aerosol (fog) form;
- Are hypoallergenic;
- Yield by-products that are non-toxic, environmentally friendly and leave no synthetic chemical residue;
- Can be generated on-site, thus eliminating handling and storage of chemicals;
- Can be produced on-site from tap water and salt in required quantities and concentrations of active ingredients, pH and salinity (mineralization).

In addition, anolyte application, as a hard-surface disinfectant on a daily basis for more than ten years, demonstrated that microorganisms do not develop resistance against anolyte over time.

**The characteristics described above position Envirollyte equipment for potential applications in a number of areas directly related to personal health and safety.**

### Separate Anolyte and Catholyte Layout

This layout would be used when the disinfectant fluid (Anolyte) and the cleaning fluid (Catholyte) are required as separate liquids. This configuration is often used in applications such as surface cleaning where the Catholyte is added to warm water to facilitate its degrease action. The generator is connected to a level sensor in the first buffer tank and it will start or stop depending on the levels set at installation. Pumps can be connected to the tanks to move the fluids either into a water system or to connect to high pressure sprayers or fogging equipment for surface cleaning. In addition in the waste water industry Catholyte and Anolyte are often required as separate fluids.



### Water Systems

- Effective biocide at low dosage, including Legionella
- Removes bio-film and algae
- Neutralizes odor compounds
- Less formation of toxic by-products

### Industrial Cleaning and Disinfection

- Cleans and disinfects surfaces
- Effective biocide, including Legionella
- Removes bio-film and algae
- Clean-in-place (CIP) cleaning and disinfection

### Health Care/Medical

- Cold sterilization of medical instruments
- Cleans surfaces, including walls, furniture and floors
- Produces sterile water
- Used in the laundry, it disinfects linen
- Disinfects air through misting
- Eliminates/reduces chemical usage

### Veterinary

- Increases vitality and resistance
- Improves fertility
- Residue free treatment of mastitis, diarrhea and infection
- Better feed stuff utilization
- Reduces tension
- Enhances growth and yields.
- Effectively controls and cures the most serious diseases

### Poultry Industry

- General disinfection
- Surface cleaning and misting medium for aerobic and anaerobic bacteria
- Fodder assimilation
- Promotion of general health as a drinking water additive (reduced mortality)
- Pest control on feathers (lice)
- De feathering, aerobic and anaerobic bacteria control through misting
- Equipment cleaning without further additives.
- Disease control and cure



### Pig Farming

- General disinfection
- Surface cleaning and misting medium for aerobic and anaerobic bacteria
- Fodder assimilation
- Promotion of general health as a drinking water additive (reduced mortality)
- Pest control on the skin.
- Aerobic and anaerobic bacteria control through misting
- Equipment cleaning without further additives
- Disease control and cure



### Dairy Farming

- General disinfection
- Surface cleaning and misting medium for aerobic and anaerobic bacteria
- Fodder assimilation
- Promotion of general health as a drinking water additive (reduced mortality)
- Pest control on the skin.
- Aerobic and anaerobic bacteria control through misting
- Equipment cleaning without further additives
- Disease control and cure



### Horticulture/Agriculture

- Disinfect grain for storage
- Preserves fodder/silage
- Suppresses pathogenic fungi on plants
- Prolongs the shelf life of vegetables, fruit and cut flowers
- Disinfects irrigation water and decreases the effluent toxicity
- Disinfects seeds, accelerating the growth of the plants, increasing the number of flowers and yield




### Waste Water

- Disinfects municipal effluent
- Disinfects livestock manure
- Neutralization and flocculates heavy metals



### Cooling Towers

- Prevents formation of insoluble calcium and magnesium salts (scale and calcification).
- Prevents the growth of algae, bio-film and anaerobic bacteria such as Legionella

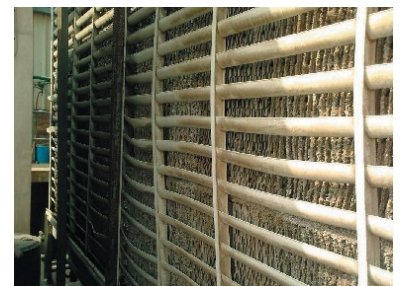

## Breweries

- Treatment of incoming water and brewing water.
- Disinfection of all surfaces in the production process.
- Bottle washing.
- Filling plants, pumps, filters, reservoirs, water tanks, wells.
- Rinsing of installations.
- Disinfection of all installations, pipelines, working cloths etc.
- Pipeline protection.
- Cooling installations, air cleaning systems

## Food Processing

- Disinfection of incoming and rinse water.
- Prolongs the shelf life of vegetables, fruit and cut flowers.
- Disinfection of all surfaces in the production process.
- Equipment cleaning without further additives.
- General disinfection, control of fungi growth in the premises.
- Clean-in-place (CIP) cleaning and disinfection.
- Disinfection of various produce before packaging.

## Swimming Pools



Product:

- Does not irritate airway
- Does not cause allergy
- Easy to use and handle - it is prepared on site and on demand
- Cheap (1m<sup>3</sup> of ANK Anolyte cost about € 3)

**Enviolyte W.P.C.Ltd.**

**Pohja pst 25  
10415 Tallinn  
Estonia**

**Phone +32-494-637154\_**

**[wolfgang.knippert@skynet.be](mailto:wolfgang.knippert@skynet.be)  
[www.enviolyte-benelux.com](http://www.enviolyte-benelux.com)**